

BR1


轴套 Cylindrical Bushes (内径. $\text{D} \square 5 \sim \square 40$)



请从适用的内径、外径、长度中选择零件号
(例)内径15mm、长度10mm的情况下

BR1 - 1510

请指定上述零件号

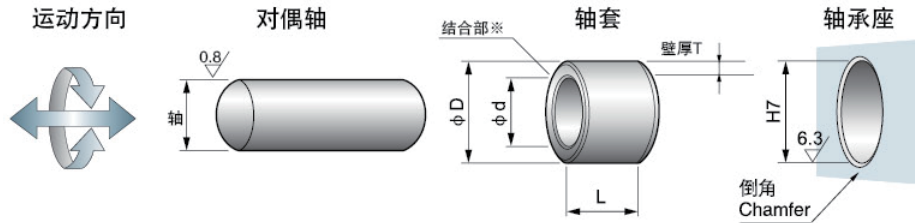


※结合部对于轴旋转没有影响，但尽量避免安装在负荷大的部位处压入。

单位Unit: mm

轴 shaft	座孔housing		内径	外径		壁厚		长度 L $\frac{0.00}{0.00}$					
	H7		$\square d$	$\square D$		T		4	5	6	8	10	
5	-0.010 -0.022	7	+0.015 0	5	7	+0.055 +0.025	1.0	+0.005 -0.020		0505			
6	-0.013 -0.028	8	"	6	8	"	"	"	0604		0606	0608	0610
7	"	9	"	7	9	"	"	"					
8	"	10	"	8	10	"	"	"			0806	0808	0810
10	"	12	+0.018 0	10	12	+0.065 +0.030	"	"				1008	1010
12	-0.016 -0.034	14	"	12	14	"	"	"				1208	1210
13	"	15	"	13	15	"	"	"					1310
14	"	16	"	14	16	+0.065 +0.035	"	"		1405			1410
15	"	17	"	15	17	"	"	"					1510
16	"	18	"	16	18	"	"	"					1610
17	"	19	+0.021 0	17	19	+0.075 +0.035	"	"					1710
18	"	20	"	18	20	"	"	"					1810
20	-0.020 -0.041	23	"	20	23	"	1.5	+0.005 -0.025					2010
22	"	25	"	22	25	"	"	"					2210
24	"	27	"	24	27	"	"	"					
25	"	28	"	25	28	"	"	"					2510
28	"	32	+0.025 0	28	32	+0.085 +0.045	2.0	+0.005 -0.030					
30	"	34	"	30	34	"	"	"					
32	-0.025 -0.050	36	"	32	36	"	"	"					
35	"	39	"	35	39	"	"	"					
37	"	41	"	37	41	"	"	"					
38	"	42	"	38	42	"	"	"					
40	"	44	"	40	44	"	"	"					

BR1

轴套 Cylindrical Bushes (内径I.D \times 5~ \times 40)

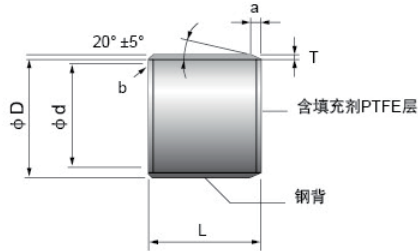

a: 外径倒角 内径 \times 10以上(mm)

T	1.0	1.5	2.0
a	0.5	0.8	1.0

b: 内径倒角 内径 \times 10以上(mm)

T	1.0	1.5	2.0
b	C0.5	C0.8	C1.0

※ 内径 \times 10不到的内外径倒角去除毛刺程度即可

单位Unit: mm

长度 L $\overset{0}{-0.40}$								内径
12	15	20	25	30	35	40	50	\times d
								5
								6
								7
0812	0815							8
1012	1015	1020						10
1212	1215	1220	1225					12
		1320						13
1412	1415	1420	1425					14
1512	1515	1520	1525					15
1612	1615	1620	1625					16
		1720						17
	1815	1820	1825					18
	2015	2020	2025	2030				20
	2215	2220	2225	2230				22
	2415	2420	2425	2430				24
	2515	2520	2525	2530			2550	25
	2815	2820	2825	2830				28
	3015	3020	3025	3030		3040	3050	30
		3220		3230				32
		3520		3530	3535	3540		35
		3720						37
		3820		3830		3840		38
		4020		4030		4040	4050	40

BR1


轴套 Cylindrical bushes (内径I.D \square 45~ \square 260)



请从适用的内径、外径、长度中选择零件号
(例)内径60mm、长度50mm的情况下

BR1 - 6050

请指定上述零件号

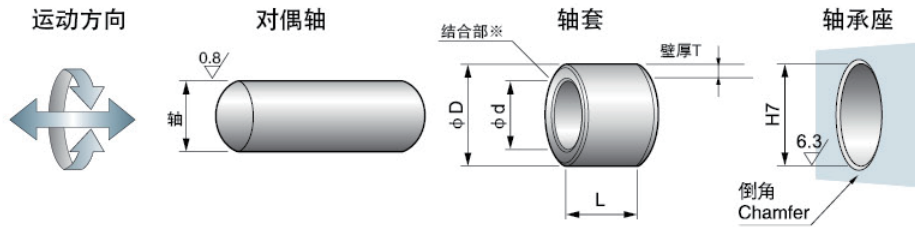


※结合部对于轴旋转没有影响，但尽量避免安装在负荷大的部位处压入。

单位Unit: mm

轴 shaft	座孔housing		内径	外径		壁厚		长度 L $\overset{0}{-0.40}$			
	H7			\square d	\square D	T		20	25	30	
45	-0.025 -0.050	50	+0.025 0	45	50	+0.085 +0.045	2.5	+0.005 -0.040	4520	4525	4530
50	"	55	+0.030 0	50	55	+0.100 +0.055	"	"	5020		5030
55	-0.030 -0.060	60	"	55	60	"	"	"			5530
60	"	65	"	60	65	"	"	"			6030
65	"	70	"	65	70	"	"	"			6530
70	"	75	"	70	75	"	"	"			
75	"	80	"	75	80	"	"	"			7530
80	0 -0.030	85	+0.035 0	80	85	+0.120 +0.070	"	-0.010 -0.060			
85	0 -0.035	90	"	85	90	"	"	"			
90	"	95	"	90	95	"	"	"			
95	"	100	"	95	100	"	"	"			
100	"	105	"	100	105	"	"	"			
105	"	110	"	105	110	"	"	"			
110	"	115	"	110	115	"	"	"			
115	"	120	"	115	120	"	"	"			
120	"	125	+0.040 0	120	125	+0.170 +0.100	"	-0.035 -0.085			
125	0 -0.040	130	"	125	130	"	"	"			
130	"	135	"	130	135	"	"	"			
135	"	140	"	135	140	"	"	"			
140	"	145	"	140	145	"	"	"			
150	"	155	"	150	155	"	"	"			
160	"	165	"	160	165	"	"	"			
180	"	185	+0.046 0	180	185	+0.210 +0.130	"	"			
190	0 -0.046	195	"	190	195	"	"	"			
200	"	205	"	200	205	"	"	"			
220	"	225	"	220	225	"	"	"			
250	"	255	+0.052 0	250	255	+0.260 +0.170	"	"			
260	"	265	"	260	265	"	"	"			

BR1

轴套 Cylindrical bushes (内径I.D. \square 45~ \square 260)

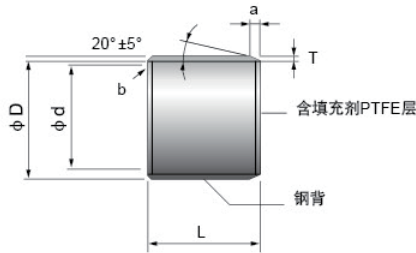

a:外径倒角(mm)

T	2.0	2.5
a	1.0	1.0

b:内径倒角(mm)

T	2.0	2.5
b	C0.5	C0.5

单位Unit: mm

长度 L $\begin{smallmatrix} 0 \\ -0.40 \end{smallmatrix}$							内径
40	50	60	70	80	100	115	\square d
4540	4550						45
5040	5050	5060					50
5540	5550	5560					55
6040	6050	6060	6070				60
6540	6550	6560	6570				65
7040	7050	7060	7070	7080			70
7540	7550	7560	7570	7580			75
8040	8050	8060	8070	8080	80100		80
8540		8560		8580	85100		85
9040	9050	9060		9080	90100		90
	9550	9560		9580	95100		95
	10050	10060		10080		100115	100
		10560		10580		105115	105
		11060		11080		110115	110
		11560		11580			115
		12060		12080	120100		120
					125100		125
		13060		13080	130100		130
				13580	135100		135
		14060		14080	140100		140
		15060		15080	150100		150
		16060		16080	160100	160115	160
				18080	180100		180
				19080	190100		190
		20060		20080	200100		200
				22080	220100		220
				25080	250100		250
				26080	260100		260